


## ADJUSTING TOILET WATER VOLUME



- 1.**  
Remove hanger  
from the product.

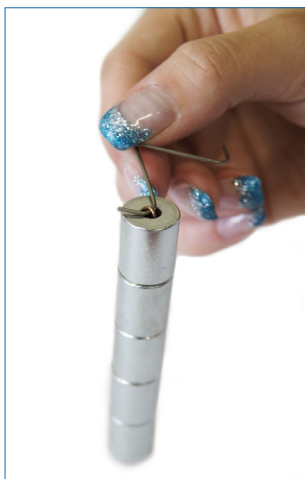

- 2.**  
Remove desired  
amount of stainless steel  
cylinders.



- 3.**  
Return hanger to  
the product.



- 3.**  
Toilet Water Saver is  
ready to be installed.

### USING CYLINDERS TO SET DESIRED VOLUME OF FLUSHED WATER

5 cylinders will save 70% of flushed water.  
If the toilet container holds 3 gallons of water, it would only flush less than a gallon.  
By removing cylinders, the volume of flushed water will increase.  
Each cylinder will add 0.25-0.5 gallon of flushed water.

If the toilet has 2-button system and the Toilet Water Saver has 5 cylinders, small flush will save 50% of water volume.  
You will flush half a gallon instead of the whole one.  
To increase a volume of flushed water, remove cylinders from Toilet Water Saver - each cylinder removed will add 0.1 -0.2 gallons of water.

